

# nifty

# HR15

**SELF PROPELLED  
ACCESS PLATFORM**



**15.75m (51ft 8in)**  
Working height

**9.60m (31ft 6in)**  
Working outreach

**2.00m Chassis Width**  
Allowing operation in  
confined areas

**45% Gradeability**  
4WD for rough terrain

**Fully Proportional  
Hydraulic Controls**  
Simple, reliable &  
easy to maintain

**1.80m Wide Platform**  
More room for tools  
& equipment

**Platform Rotation  
& Flyboom**  
Improved access to applications



[niftylift.com.au](http://niftylift.com.au)




# nifty

## Heightrider 15


The Nifty **Height Rider 15** offers one of the best working envelopes in its class and its compact yet robust base allows it to manoeuvre easily in restricted areas. A huge 1.80m wide platform provides more room for materials and tools and a 150° flyboom with platform rotation, helps to increase accuracy when positioning. Operation and maintenance are simple due to fully proportional hydraulic controls and the 4WD allows the **HR15** to travel over rough and uneven ground.

### SAFETY FEATURES

- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Dual Harness Points
- Tilt Alarm
- CE Mark
- Foam Filled Tyres
- Automatic Failsafe Brakes
- Lock Valves on all Hydraulic Cylinders

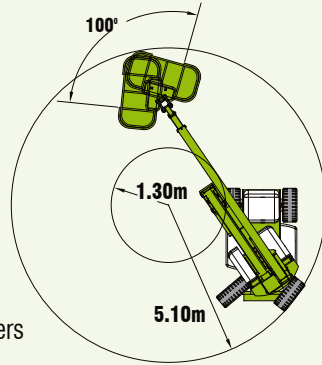

The unique suspension system shown above ensures maximum traction when travelling over uneven surfaces and the spacious 1.80m wide platform allows the operator ample room for tools and materials.

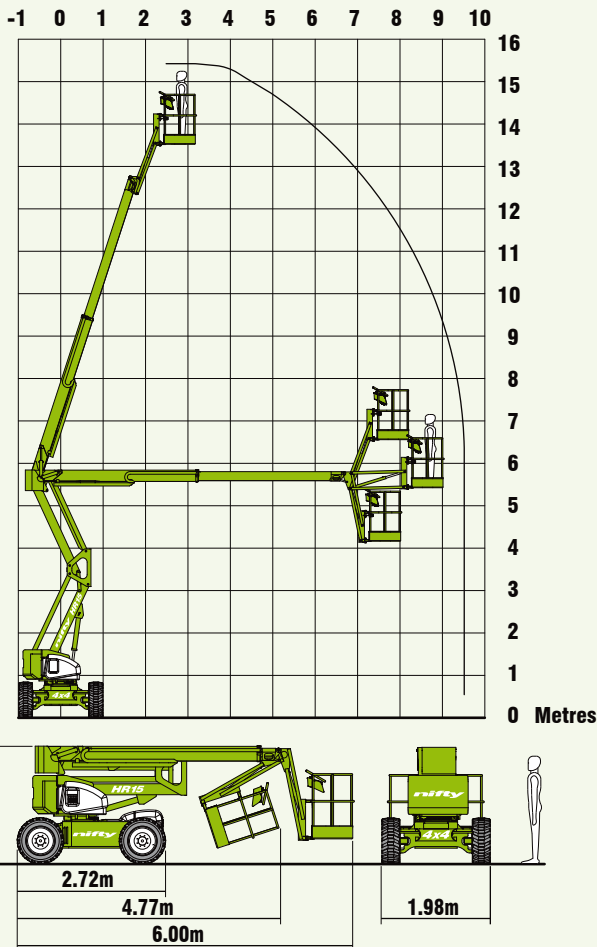

### SPECIFICATIONS

<b>Working Height</b>	15.75m	51ft 8in
<b>Platform Height</b>	13.75m	45ft 1in
<b>Working Outreach</b>	9.60m	31ft 6in
<b>Slew</b>	360°	
<b>Flyboom Arc</b>	150°	
<b>Width</b>	2.00m	6ft 7in
<b>Height</b>	2.10m	6ft 11in
<b>Length - Overall</b>	6.00m	19ft 8in
<b>- Stowed</b>	4.80m	15ft 9in
<b>Minimum Weight</b>	5,800kg*	12,800lbs*
<b>Turning Radius - Inside</b>	1.30m	4ft 3in
<b>- Outside</b>	5.10m	16ft 9in
<b>Platform Rotation</b>	100°	
<b>Platform Capacity</b>	225kg	500lbs
<b>Platform Size</b>	1.80m x 0.70m	5ft 11in x 2ft 4in
<b>Drive Speed</b>	6.6kph	4.1mph
<b>Gradeability</b>	45%	
<b>Power System</b>	Kubota 1505 32Hp	

\* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

**Manufacturers of trailer mounted,  
self propelled and vehicle mounted platforms.**

**NIFTYLIFT PTY LTD**  
11 Kennington Drive  
Tomago  
NSW 2322  
Australia



www.niftylift.com.au  
e-mail: [jking@niftylift.com.au](mailto:jking@niftylift.com.au)  
Tel.: +64 (0) 2 4964 9765  
Fax.: +64 (0) 2 4964 9714